


No. of Contacts	DIMENSIONS		REMARK	
	A	B	有鼻	無鼻
6	2.00	3.20	⊕	
8	3.00	4.20	⊕	
10	4.00	5.20	⊕	
12	5.00	6.20		
14	6.00	7.20		
16	7.00	8.20	⊕	
18	8.00	9.20	⊕	
20	9.00	10.20	⊕	
22	10.00	11.20	⊕	
24	11.00	12.20	⊕	
26	12.00	13.20		
28	13.00	14.20		
30	14.00	15.20	⊕	
32	15.00	16.20	⊕	
34	16.00	17.20		
36	17.00	18.20		
38	18.00	19.20		
40	19.00	20.20	⊕	
42	20.00	21.20		
44	21.00	22.20		
46	22.00	23.20		
48	23.00	24.20		
50	24.00	25.20	⊕	
52	25.00	26.20		
54	26.00	27.20		
56	27.00	28.20		
58	28.00	29.20		
60	29.00	30.20	⊕	
62	30.00	31.20	⊕	
64	31.00	32.20	⊕	

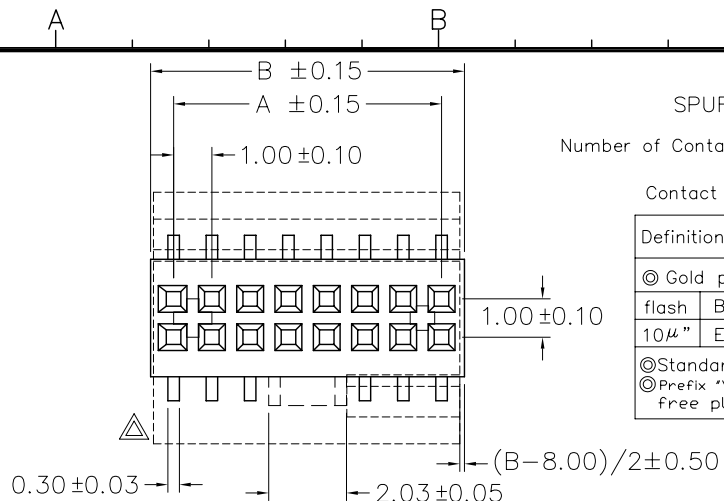

SPUFZ-XXS2-X-X-*-*
 NULL: TUBE(W/O PAD)
 P : PAD+TUBE
 R : PAD+REEL
 F1 : FILM+TUBE
 NULL: With Polarization Bump
 0: W/O Polarization Bump
 0: W/O Locating peg
 1: With Locating peg

Number of Contacts

Contact Plating

Definition	Code
⊕ Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J
⊕ Standard: B	
⊕ Prefix "V" means lead free plating.	


SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Contact resistance: 20 m ohms max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C

Contact Material: Phosphor Bronze.
 Insulator Material: High Temperature Thermoplastic, UL 94V-0
 Color : Black

Finish: Gold plated
 ⊕ Standard: Gold flash all over

PAD TYPE

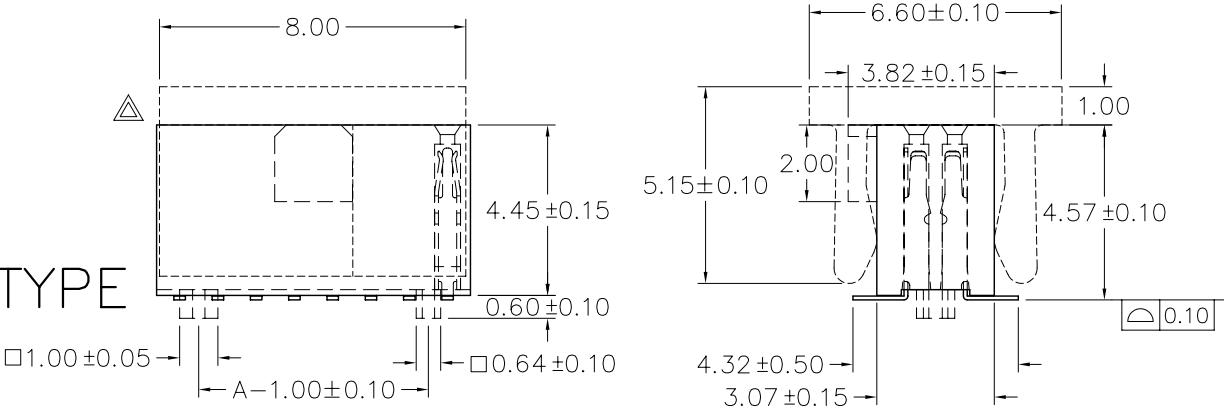

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)


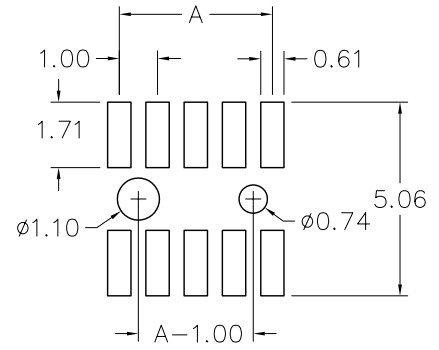


Diagram	Molding description
○	mass production & assemble mold
⊙	sample & assemble mold
⊕	mass production & fix mold
⊕	sample & fix mold

FILM TYPE



Rev.	ECN Number	Description	Drawn	Date
7	ECR-530045	新增防呆結構選項	陳顯鑫	03/28 05'
8	ECR-580112	圖面修正	陳美竹	08/30 05'
9	ECR-5A0008	PAD 去掉導角	李建勝	10/12 05'

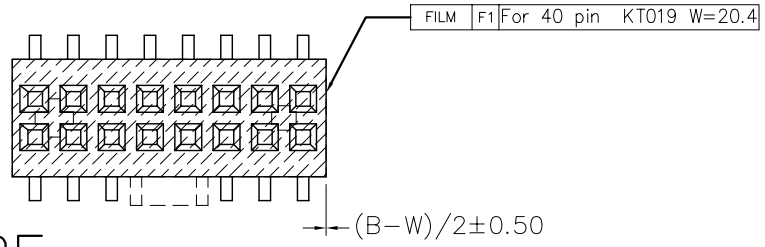

GENERAL TOLERANCE		SCALE	ORIGINAL DRAWN	DATE
XX. ± 0.50	XXX. ±	1=1	林秋蘭	15/05 03'
X. ± 0.30	.XXX ±	UNIT	陳顯鑫	DATE
.X ± 0.25	X. ± 4°	MM	林錫錦	10/12 05'
.XX ± 0.20	.X ± 4°	SIZE		DATE
		A4/X		10/12 05'

CHECK	DATE
林秋蘭	15/05 03'
陳顯鑫	10/12 05'
林錫錦	10/12 05'

DWG. NO.	TITLE	REV.
X-XX	1.0X1.0mm SMD SOCKET (成品規格圖)	9
F:\DWG\CDWG\PUF\PUFZMOD.DWG		SHEET
PARTS NO. SPUFZ-XXS2-X-X-*		1/1