

No. of Contacts	DIMENSIONS		REMARK (備註)
	A	B	
4	2.00	4.00	○
6	4.00	6.00	○
8	6.00	8.00	○
10	8.00	10.00	○
12	10.00	12.00	○
14	12.00	14.00	○
16	14.00	16.00	○
18	16.00	18.00	○
20	18.00	20.00	○
22	20.00	22.00	○
24	22.00	24.00	○
26	24.00	26.00	○
28	26.00	28.00	○
30	28.00	30.00	○
32	30.00	32.00	○
34	32.00	34.00	○
36	34.00	36.00	○
38	36.00	38.00	○
40	38.00	40.00	○
42	40.00	42.00	○
44	42.00	44.00	○
46	44.00	46.00	○
48	46.00	48.00	○
50	48.00	50.00	○
52	50.00	52.00	○
54	52.00	54.00	○
56	54.00	56.00	○
58	56.00	58.00	○
60	58.00	60.00	○
62	60.00	62.00	○
64	62.00	64.00	○
66	64.00	66.00	○
68	66.00	68.00	○
70	68.00	70.00	○
72	70.00	72.00	○
74	72.00	74.00	○
76	74.00	76.00	○
78	76.00	78.00	○

PARTS NO.	C	D	REMARK (備註)
PAN-XX-X-020/012	2.00	1.20	○
PAN-XX-X-025/025	2.50	2.50	○
PAN-XX-X-030/030	3.00	3.00	○
PAN-XX-X-033/028	3.30	2.80	○
PAN-XX-X-035/035	3.50	3.50	○
PAN-XX-X-040/025	4.00	2.50	○
PAN-XX-X-040/028	4.00	2.80	○
PAN-XX-X-068/020	6.80	2.00	○
PAN-XX-X-089/030	8.90	3.00	○
PAN-XX-X-025/040	2.50	4.00	○

PAN-XX-X-C/D

Contact Plating


Definition	Code
◎ Tin plated:	A
◎ Gold plated:	
flash B 15μ" F	
10μ" E 30μ" J	
◎ Duplex plating:	
flash K 15μ" P	
10μ" N 30μ" U	
◎ Standard: K	
◎ Prefix *V* means lead free plating.	

Number of Contacts


SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Copper alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0
 Color : Black

Finish: Gold Plated
 ◎ Standard: Gold flash all over

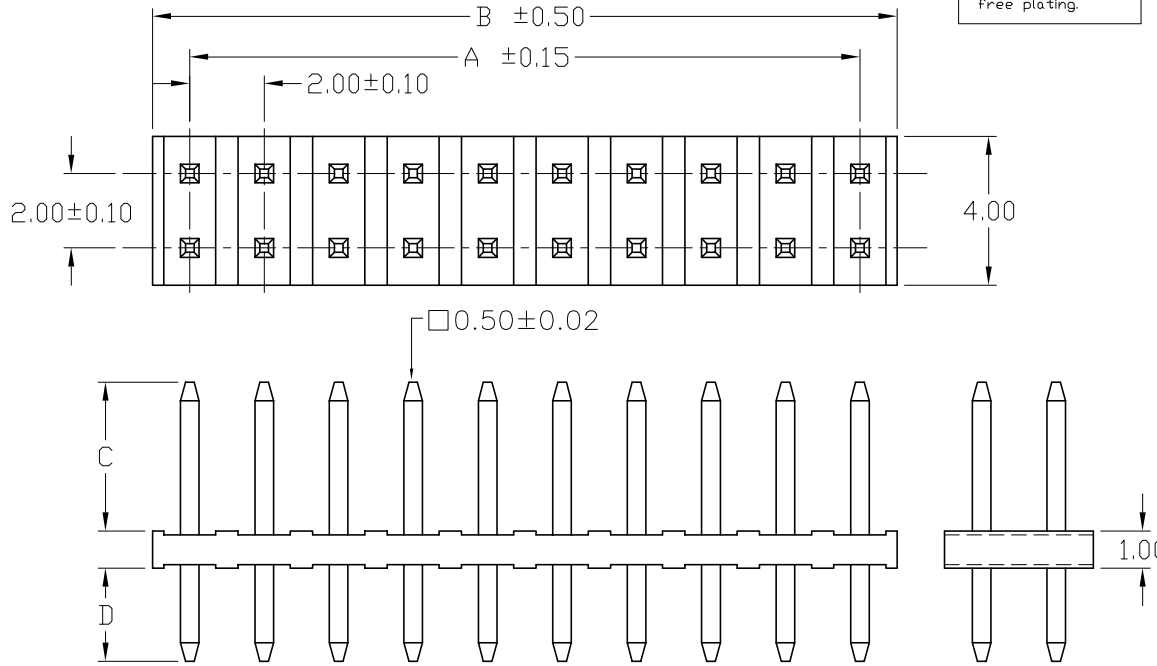

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)



Rev.	ECN Number	Description	Drawn	Date



GENERAL TOLERANCE	
XX. ± 0.50	XXX. ±
X. ± 0.30	.XXX ±
.X ± 0.25	.X° ± 4°
.XX ± 0.20	.X° ± 4°

SCALE 1=1	UNIT MM	SIZE A4/5
-----------	---------	-----------

ORIGINAL DRAWN 邱若婷	DATE 09/24 04'
CHECK 林錫錦	DATE 09/24 04'
APPROVE 林錫錦	DATE 09/24 04'

DWG. NO. 2-26	TITLE 2.0X2.0mm HEADER (成品規格圖)
F: \DWG\CDWG\PAN\PANS0K.DWG	
PARTS NO. PAN-XX-X-C/D	

REV. 1
SHEET 1/1