
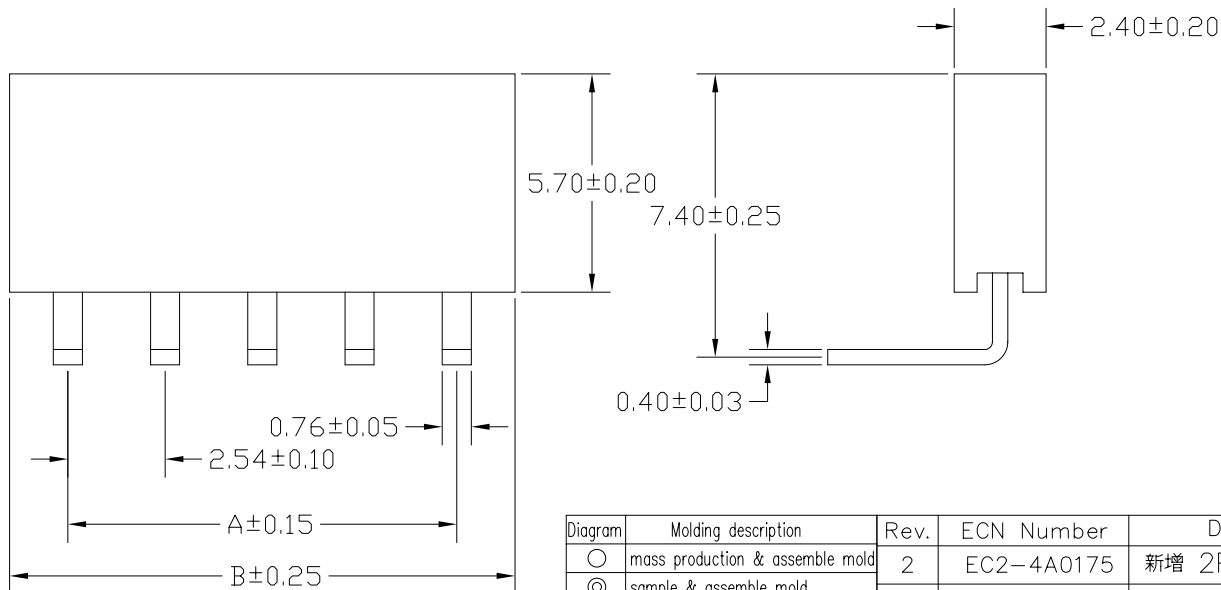


No. of Contacts	DIMENSIONS		REMARK (備註)
	A	C	
2	2.54	5.58	○
3	5.08	8.12	○
4	7.62	10.66	○
5	10.16	13.20	○
6	12.70	15.74	○
7	15.24	18.28	○
8	17.78	20.82	○
9	20.32	23.36	○
10	22.86	25.90	○
11	25.40	28.44	○
12	27.94	30.98	○
13	30.48	33.52	○
14	33.02	36.06	○
15	35.56	38.60	○
16	38.10	41.14	○
17	40.64	43.68	○
18	43.18	45.72	○
19	45.72	48.76	○
20	48.26	51.30	○
21	50.80	53.84	○
22	53.34	55.88	○
23	55.88	58.42	○
24	58.42	61.46	○
25	60.96	64.00	○
26	63.50	66.54	○
27	66.04	69.08	○
28	68.58	71.62	○
29	71.12	74.16	○
30	73.66	76.70	○
31	76.20	79.24	○
32	78.74	81.78	○
33	81.28	84.32	○
34	83.82	86.86	○
35	86.36	89.40	○
36	88.90	91.94	○
37	91.44	94.48	○
38	93.98	97.02	○
39	96.52	99.56	○
40	99.06	102.10	○

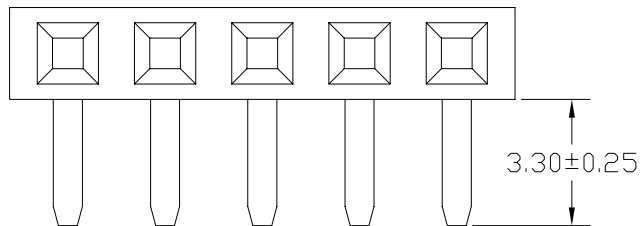

PMFY-XXR-X-033-*

Number of Contacts
Right Angle

Pin Length mm

Contact Plating

NULL: P.B.T
F: Niom-6T

Definition	Code
◎ Tin plated:	A
◎ Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J
◎ Duplex plating:	
flash K 15μ"	P
10μ" N 30μ"	U
◎ Standard: B	
◎ Prefix "V" means lead free plating.	

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms min.
 Contact resistance: 20 m ohms max.
 Dielectric withstanding: AC 1000 V
 Operating Temperature: -40°~+105°C
 Contact Material: Phosphor Bronze.
 Insulator Material: Thermoplastic, UL 94V-0 or High Temperature (See P/N Option)

Finish: Tin, Gold or Duplex plated
 ◎ Standard: Gold flash all over
 ◎ Note: Duplex plating: gold plated on contact area, Tin on solder area
 Harmful material should be compliant to Doc "EI-0005" Standards.

Diagram	Molding description	Rev.	ECN Number	Description	Drawn	Date
○	mass production & assemble mold	2	EC2-4A0175	新增 2PIN	洪銀雯	10/11 04'
◎	sample & assemble mold	3	EC3-630073	新增 6T 材質及無鉛電鍍碼	詹益東	03/20 06'
⊕	mass production & fix mold					
⊗	sample & fix mold					



GENERAL TOLERANCE		SCALE 5=1	ORIGINAL DRAWN 江坤容	DATE 01-10-02'	DWG. NO. F:\DWG\CDWG\PMF\PMFYROE.DWG	TITLE 2.54mm SOCKET (成品規格圖)	REV. 3
XX. ± 0.50	XXX. ±	UNIT MM	CHECK 林錫錦	DATE 03/20 06'			SHEET 1/1
X. ± 0.30	.XXX ±	SIZE A4	APPROVE 林錫錦	DATE 03/20 06'	PARTS NO. PMFY-XXR-X-033-*		
.X ± 0.25	X.° ± 4°						
.XX ± 0.20	.X° ± 4°						