



No. of Contacts	DIMENSIONS		REMARK (備註)
	A	B	
4	2.00	4.00	○
6	4.00	6.00	○
8	6.00	8.00	○
10	8.00	10.00	○
12	10.00	12.00	○
14	12.00	14.00	○
16	14.00	16.00	○
18	16.00	18.00	○
20	18.00	20.00	○
22	20.00	22.00	○
24	22.00	24.00	○
26	24.00	26.00	○
28	26.00	28.00	○
30	28.00	30.00	○
32	30.00	32.00	○
34	32.00	34.00	○
36	34.00	36.00	○
38	36.00	38.00	○
40	38.00	40.00	○
42	40.00	42.00	○
44	42.00	44.00	○
46	44.00	46.00	○
48	46.00	48.00	○
50	48.00	50.00	○
52	50.00	52.00	○
54	52.00	54.00	○
56	54.00	56.00	○
58	56.00	58.00	○
60	58.00	60.00	○
62	60.00	62.00	○
64	62.00	64.00	○
66	64.00	66.00	○
68	66.00	68.00	○
70	68.00	70.00	○
72	70.00	72.00	○
74	72.00	74.00	○
76	74.00	76.00	○
78	76.00	78.00	○
80	78.00	80.00	○

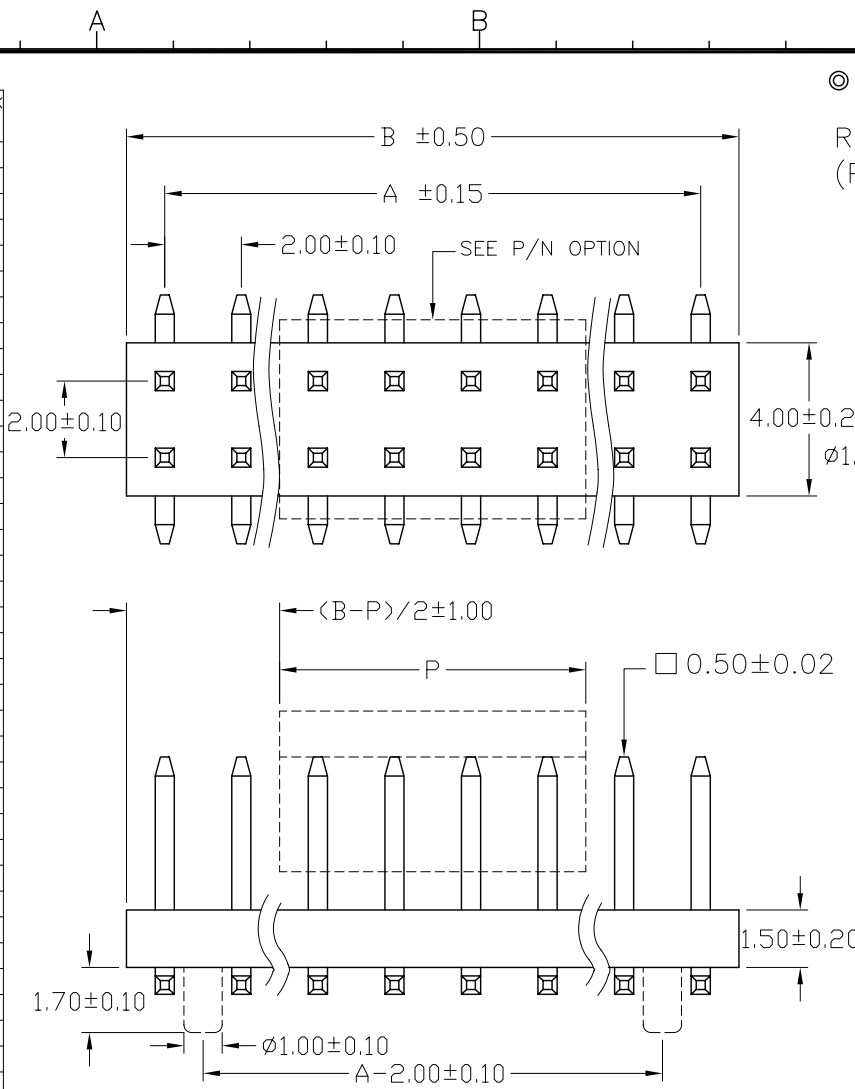

◎For illustration purpose the SXTZ-XXS3-X-040-1-P was shown
Recommended PCB Layout (PCB TOLERANCE ±0.05)

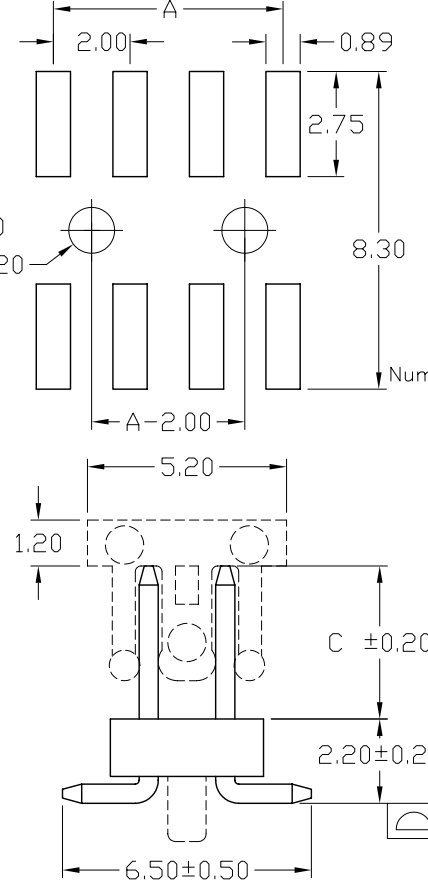

SPECIFICATIONS
 Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40° - +105°C
 Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 (Nylon-6T)
 Color: Black
 Finish: gold plated
 ◎Standard: Gold flash all over

SXTZ-XXS3-X-C-X-*
 Pin type: T
 Brass (REEL) L B P
 Phosphor Bronze L B P
 ◎Standard: L
 NULL: W/O PAD
 P: PAD+TUBE
 R: PAD+REEL
 0: W/O Locating peg
 1: With Locating peg

Definition	Code
◎ Tin plated:	A
◎ Gold plated:	
flash B	15μ" F
10μ" E	30μ" J
◎ Duplex plating:	
flash K	15μ" P
10μ" N	30μ" U
◎ Standard:	B
◎ Prefix "v" means lead free plating.	

特殊規格
 1. 針長尺寸依客戶訂單為標準
 2. 加 PAD

料號	P
其它料號	8.00
SXTZ-04S3-B-080-* SXTZ-06S3-B-080-* SXTZ-04S3-B-040-0-R	5.00

Diagram	Molding description	Rev.	ECN Number	Description	Drawn	Date
○	mass production & assemble mold	11	EC2-550163	新增6PIN以下包含6PIN使用PAD0050	洪博積	05/13 05'
◎	sample & assemble mold	12	ECR-570059	修改PAD適用註解	洪博積	07/12 05'
⊕	mass production & fix mold	13	ECR-570046	SXTZ-04S3-X-040-R變型PAD	陳美竹	07/15 05'
⊗	sample & fix mold					



GENERAL TOLERANCE	SCALE 1=1	ORIGINAL DRAWN	DATE	DWG. NO.	TITLE	REV.
XX. ± 0.50	UNIT MM	王斌云	03'/08/04	1-18	2.00X2.00mm SMD HEADER (成品規格圖)	13
X. ± 0.30	SIZE A4/5	林錫錦	07/15 05'	F: \DWG\CDWG\TZ\TSM4M.DWG		
.X ± 0.25		林錫錦	07/15 05'	PARTS NO. SXTZ-XXS3-X-C-X-*		
.XX ± 0.20						SHEET 1/2