


No. of Contacts	DIMENSIONS		REMARK (mm)
	A	C	
4	2.54	5.58	○
6	5.08	8.12	○
8	7.62	10.66	○
10	10.16	13.20	○
12	12.70	15.74	○
14	15.24	18.28	○
16	17.78	20.82	○
18	20.32	23.36	○
20	22.86	25.90	○
22	25.40	28.44	○
24	27.94	30.98	○
26	30.48	33.52	○
28	33.02	36.06	○
30	35.56	38.60	○
32	38.10	41.14	○
34	40.64	43.68	○
36	43.18	45.72	○
38	45.72	48.76	○
40	48.26	51.30	○
42	50.80	53.84	○
44	53.34	55.88	○
46	55.88	58.42	○
48	58.42	61.46	○
50	60.96	64.00	○
52	63.50	66.54	○
54	66.04	69.08	○
56	68.58	71.62	○
58	71.12	74.16	○
60	73.66	76.70	○
62	76.20	79.24	○
64	78.74	81.78	○
66	81.28	84.32	○
68	83.82	86.86	○
70	86.36	89.40	○
72	88.90	91.94	○
74	91.44	94.48	○
76	93.98	97.02	○
78	96.52	99.56	○
80	99.06	102.1	○

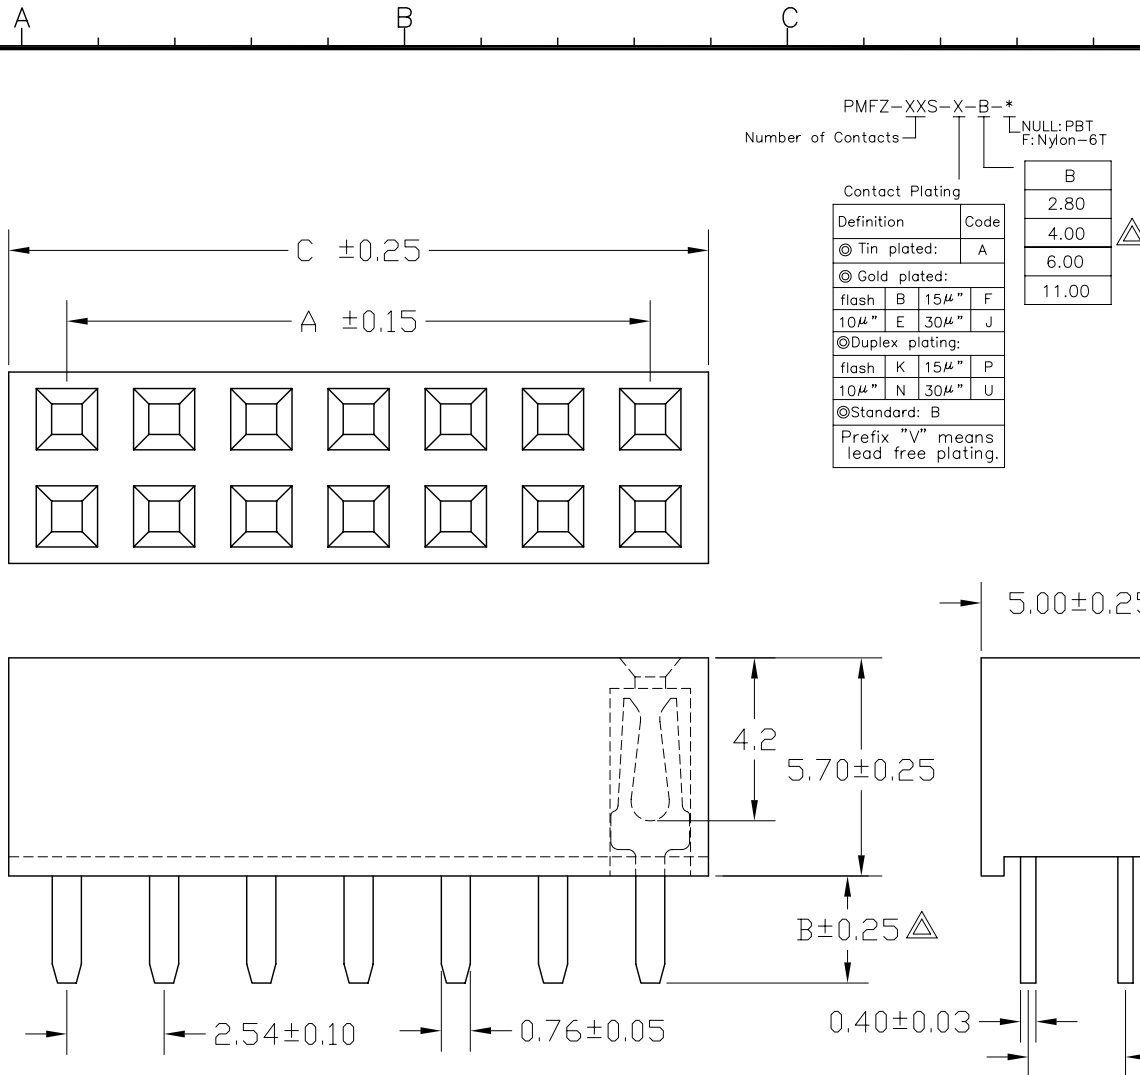

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms min.
 Contact resistance: 20 m ohms max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Contact Material: Phosphor Bronze.
 Insulator Material: Polyester, UL 94V-0
 ◎Standard: P.B.T

Finish: Tin, Gold or Duplex plated
 ◎ Standard: Gold flash all over
 ◎ Note:
 Duplex plating: gold plated on contact area,
 Tin on solder area

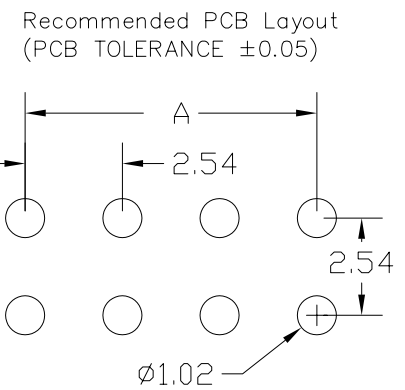


Diagram	Molding description	Rev.	ECN Number	Description	Drawn	Date
○	mass production & assemble mold	2	DOC9303523	圖面新增	林秋蘭	03/26/04'
◎	sample & assemble mold	3	EC2-490210	新增無鉛電鍍說明	陳美竹	09/13 04'
⊕	mass production & fix mold	4	EC2-570057	新增4.00針長選項	陳顯鑫	07/08 05'
⊗	sample & fix mold					



GENERAL TOLERANCE		SCALE 1=1	ORIGINAL DRAWN 林秋蘭	DATE 03/26/04'	DWG. NO. X-XX	TITLE 2.54mm SOCKET (成品規格圖)	REV. 4
XX. ± 0.50	XXX. ±	UNIT MM	CHECK 林錫錦	DATE 07/08 05'			PARTS NO. PMFZ-XXS-X-B-*
X. ± 0.30	.XXX ±	SIZE A4/X	APPROVE 林錫錦	DATE 07/08 05'			
.X ± 0.25	X.° ± 4°						
.XX ± 0.20	.X° ± 4°						