


No. of Contacts	DIMENSIONS		REMARK (備註)
	A	B	
4	2.54	5.08	○
6	5.08	7.62	○
8	7.62	10.16	○
10	10.16	12.70	○
12	12.70	15.24	○
14	15.24	17.78	○
16	17.78	20.32	○
18	20.32	22.86	○
20	22.86	25.40	○
22	25.40	27.94	○
24	27.94	30.48	○
26	30.48	33.02	○
28	33.02	35.56	○
30	35.56	38.10	○
32	38.10	40.64	○
34	40.64	43.18	○
36	43.18	45.72	○
38	45.72	48.26	○
40	48.26	50.80	○
42	50.80	53.34	○
44	53.34	55.88	○
46	55.88	58.42	○
48	58.42	60.96	○
50	60.96	63.50	○
52	63.50	66.04	○
54	66.04	68.58	○
56	68.58	71.12	○
58	71.12	73.66	○
60	73.66	76.20	○
62	76.20	78.74	○
64	78.74	81.28	○
66	81.28	83.82	○
68	83.82	86.36	○
70	86.36	88.90	○
72	88.90	91.44	○
74	91.44	93.98	○
76	93.98	96.52	○
78	96.52	99.06	○
80	99.06	101.60	○

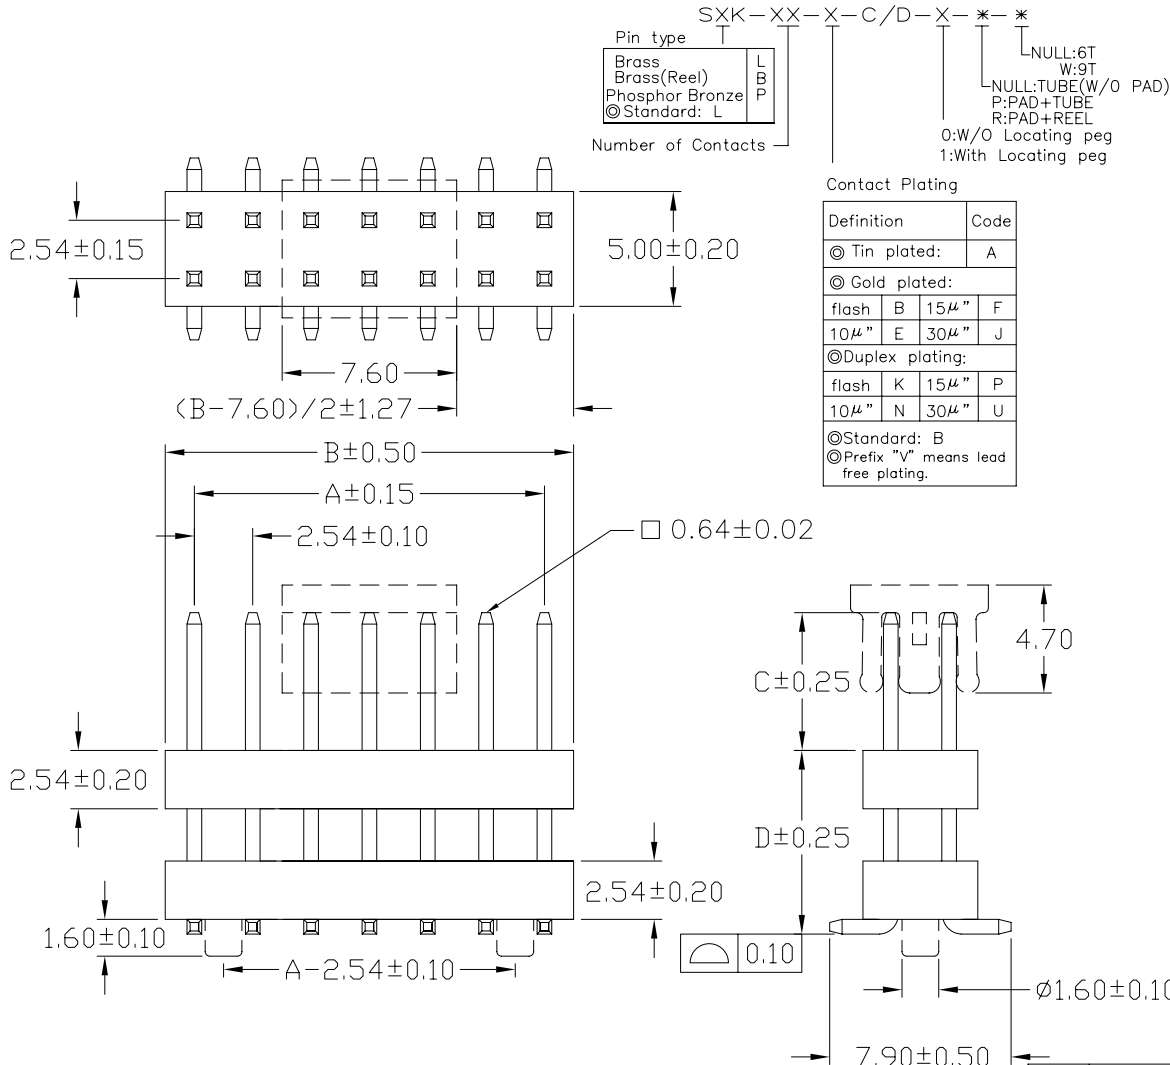

**SPECIFICATIONS**

Current Rating: 3 Amps  
 Insulator resistance: 5000 Megohms min.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40°~+105°C  
 Contact Material: Copper alloy  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 (Nylon-6T)  
 Color: Black  
 Finish: Tin, Gold or Duplex plated  
 ◎ Standard: Gold flash all over

Harmful Material should be compliant to Doc."EI-0005" standards.

Recommended PCB Layout  
(PCB TOLERANCE ±0.05)

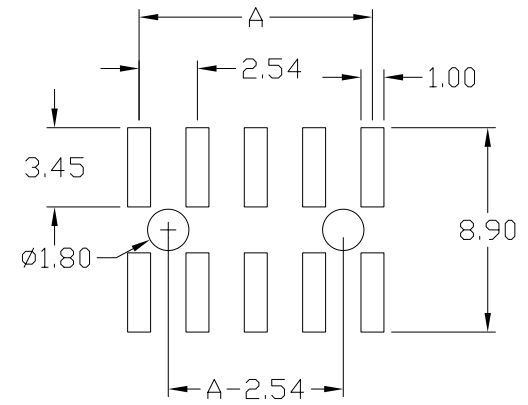


Diagram	Molding description
○	mass production & assemble mold
◎	sample & assemble mold
⊕	mass production & fix mold
⊕	sample & fix mold

Rev.	ECN Number	Description	Drawn	Date
21	EC3-590073	新增料號 SXX-XX-X-060/075-X-*	錢如旭	10/13 05'
22	EC3-5B0097	新增料號 SXX-XX-X-090/180-X-*	GAVIN	12/09 05'
23	EC3-5C0010	新增料號 SXX-XX-X-060/110-X-**	GAVIN	01/05 06'

<p>Plastron Precision Co., Ltd. 樟翔精密股份有限公司</p>	GENERAL TOLERANCE		SCALE 3=1	ORIGINAL DRAWN 邱若婷	DATE 24/06/03'	DWG. NO. 3-18 F:\DWG\CDWG\K\KM00.DWG PARTS NO. SXX-XX-X-C/D-X-*-* TITLE 2.54X2.54mm SMD BOARD STACKER (成品規格圖) REV. 23 SHEET 1/2
	XX. ± 0.50	XXX. ±	UNIT MM	CHECK 林錫錦	DATE 01/05 06'	
	X. ± 0.30	.XXX ±	SIZE A4/X	APPROVE 林錫錦	DATE 01/05 06'	
	.X ± 0.25	X.° ± 4°				
.XX ± 0.20	.X° ± 4°					