

No. of Contacts	DIMENSIONS	
	C	D
10	5.08	6.35
12	6.35	7.62
14	7.62	8.89
16	8.89	10.16
18	10.16	11.43
20	11.43	12.70
22	12.70	13.97
24	13.97	15.24
26	15.24	16.51
28	16.51	17.78
30	17.78	19.05
32	19.05	20.32
34	20.32	21.59
36	21.59	22.86
38	22.86	24.13
40	24.13	25.40
42	25.40	26.67
44	26.67	27.94
46	27.94	29.21
48	29.21	30.48
50	30.48	31.75
52	31.75	33.02
54	33.02	34.29
56	34.29	35.56
58	35.56	36.83
60	36.83	38.10
62	38.10	39.37
64	39.37	40.64
66	40.64	41.91
68	41.91	43.18
70	43.18	44.45
72	44.45	45.72
74	45.72	46.99
76	46.99	48.26
78	48.26	49.53
80	49.53	50.80
82	50.80	52.07
84	52.07	53.34
86	53.34	54.61
88	54.61	55.88
90	55.88	57.15
92	57.15	58.42
94	58.42	59.69
96	59.69	60.96
98	60.96	62.23
100	62.23	63.50

XNZ-XXS3-X-S01

Pin type
 Brass
 Bronze
 Phosphor Bronze
 ◎Standard: L

Number of Contacts
 Straight



Contact Plating

Definition	Code
◎ Tin plated:	A
◎ Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J
◎Duplex plating:	
flash K 15μ"	P
10μ" N 30μ"	U
◎Standard: B	

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Copper alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0

Finish: Tin, Gold or Duplex plated
 ◎ Standard: Duplex plated
 ◎ Note: Duplex plating: gold plated on contact area, Tin on solder area

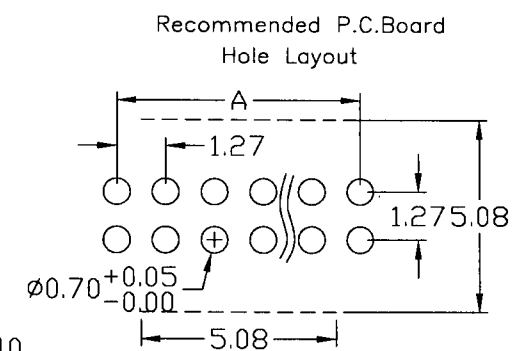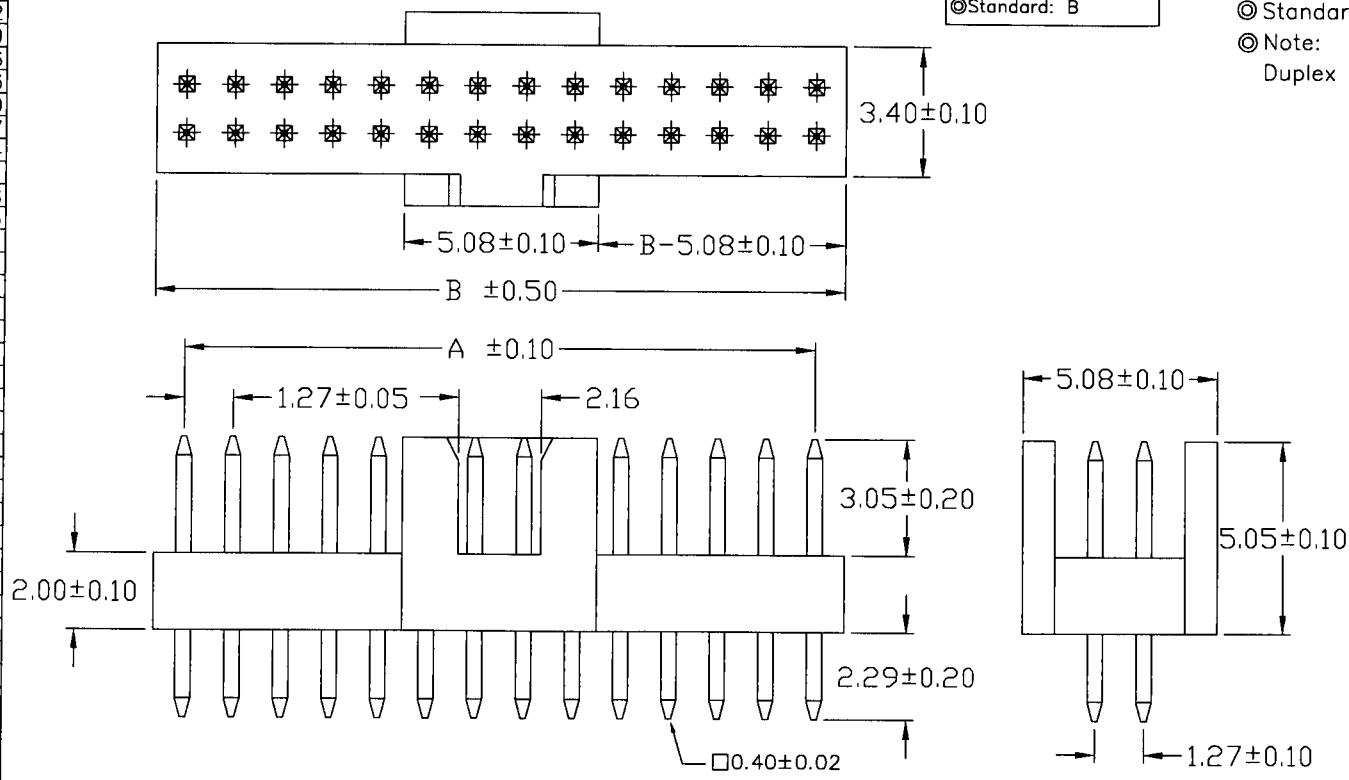

特殊規格

1. 針長尺寸為 3.05/2.29
 2. 塑膠為特殊

 Plastron Precision Co., Ltd. 樟翔精密股份有限公司	GENERAL TOLERANCE		SCALE 5=1	DRAWN 林程蘭	DATE 23-01-02'	DWG. NO. F:\DWG\CDWG\PNZ\PNZOU.DWG	TITLE 成品規格圖	REV. 1.0
	XX. ±	XXX. ±	UNIT MM	CHECK 林程蘭	DATE 24-01-01'			PARTS NO. XNZ-XXS3-X-S01
	X. ±	.XXX ±	SIZE A4	APPROVE 林程蘭	DATE 26-01-02'			
	.X ±	X. ±						
.XX ±	.X ±							